



## REDUCTION OF PREPARATORY WORK AND REWORKING

- / Minimal to no joint preparation up to a material thickness of 10 mm
- / No weld-pool support needed
- / Low level of weld seam crowning and low distortion
- / No spatter



## EASY TO USE

- / Welding parameters are easy to set and select
- / Easy changing and regrinding of electrodes
- / Electrode clamping system for setting the free end of the electrode
- / Flexibility in terms of welding position



## REDUCTION OF THE WELD SEAM VOLUME

/ Continuous production of pipes / Special machine construction


/ Turbine production

- / Welding operations in materials up to 10 mm thick without joint preparation
- / Savings on gas, filler metal and electricity



## INCREASED WELDING SPEED

/ Up to a 100% increase in the welding speed compared to the traditional TIG process

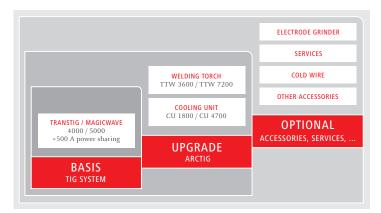

System Overview ArcTig

What's your welding challenge?

—Let's get connected.