

# FRONIUS SYMO ADVANCED UL

Powering three-phase projects that last -  
now with integrated SunSpec PLC



PC board  
replacement  
concept



SnapInverter  
Technology



Integrated Data  
Communication



Smart Grid  
Ready



SuperFlex  
Design



Power Line  
Communication



Featuring ten models ranging from 10 kW to 24 kW, the Fronius Symo Advanced is the ideal inverter for commercial applications.

The new Advanced versions combine the benefits of the Fronius Symo with additional value for states with Module Level Shutdown requirements including integrated PLC transmitter for SunSpec Rapid Shutdown communication standard, compliance with NEC pre-2014, 2014 and 2017, zero tilt mounting, light weight and field serviceability.

## TECHNICAL DATA FRONIUS SYMO ADVANCED (208-240 V VERSIONS)

INPUT DATA	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
Max. PV generator output (P <sub>dc max</sub> )	15 kW <sub>peak</sub>		18 kW <sub>peak</sub>	
Max. input current (I <sub>dc max1</sub> / I <sub>dc max2</sub> )			25 A / 16.5 A	
Max. array short circuit current (MPP1 / MPP2)			37.5 A / 24.8 A	
Nominal input voltage	350 V	370 V	350 V	370 V
DC input voltage range (U <sub>dc min</sub> + U <sub>dc max</sub> )			200 - 600 V	
Feed-in start voltage (U <sub>dc start</sub> )			200 V	
Usable MPP voltage range (U <sub>mpp min</sub> + U <sub>mpp max</sub> )			300 - 500 V	
Max. input voltage			600 V	
Admissible conductor size DC	AWG 14-AWG 6 copper direct, AWG 6 aluminum direct, AWG 4-AWG 2 copper or aluminum with input combiner			
Number of MPP trackers	2			

OUTPUT DATA	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
AC nominal output ( $P_{ac,r}$ )	9,995 W		11,995 W	
Max. output power	9,995 VA		11,995 VA	
Output configuration			208 / 240 V	
Frequency range ( $f_{min}$ - $f_{max}$ )			45 - 60 Hz	
Admissible conductor size AC			AWG 14 - AWG 6	
Total harmonic distortion	< 1.5 %		< 1.75 %	
Power factor ( $\cos \phi_{ac,r}$ )			0-1 ind. / cap.	
Max. continuous output current	27.7 A	24 A	33.3 A	28.9 A
OCPD/AC breaker size	35 A	30 A	45 A	40 A

EFFICIENCY	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
Max. Efficiency			97.0 %	
CEC Efficiency	96.5 %		96.5 %	

## TECHNICAL DATA FRONIUS SYMO (208-240 V VERSIONS)

GENERAL DATA	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
Dimensions (height x width x depth)	510 x 725 x 225 mm (20.1 x 28.5 x 8.9 inches)	
Weight	41.7 kg (91.9 lbs)	
Protection Class	NEMA 4X	
Night time consumption	< 1 W	
Inverter topology	Transformerless	
Cooling	Regulated air cooling	
Installation	Indoor and outdoor installation, tilt from 0 - 90 degrees <sup>1</sup>	
DIN rail (length x width x depth)	max. 106 x 90 x 66 mm (max. 4.2 x 3.5 x 2.6 inches)	
Ambient operating temperature range	-40 - +60 °C (-40 - +140 °F)	
Permitted humidity	0 - 100 % (non-condensing)	
Elevation	max. input voltage of 600 V up to 3,400 m (11,155 ft)	
DC connection technology	6x DC+ and 6x DC- screw terminals for copper (solid / stranded / fine stranded) or aluminum (solid / stranded)	
AC connection technology	Screw terminals 14-6 AWG	
Certificates and compliance with standards	UL 1741-2010 Second Edition (incl. UL1741 Supplement SA 2016-09 for California Rule 21 and Hawaiian Electric Code Rule 14H), UL1998 (for functions: AFCI, RCMU and isolation monitoring), IEEE 1547-2003, IEEE 1547a-2014, IEEE 1547.1-2003, ANSI/IEEE C62.41, FCC Part 15 A & B, NEC 2017 Article 690, C22. 2 No. 107.1-16, UL1699B Issue 2 -2013, CSA TIL M-07 Issue 1 -2013	

<sup>1</sup> Fronius Shade Cover required for installation angles less than 15 degree

PROTECTIVE DEVICES	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
DC reverse polarity protection	Yes	
Anti islanding	Yes	
Over temperature protection	Output power derating /Active cooling	
AFCI	Yes	
Rapid shutdown compliant	Yes	
Ground Fault Protection with Isolation Monitor Interrupter	Yes	
DC disconnect	Yes	


INTERFACES	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
USB (A socket)	Datalogging and inverter update possible via USB	
2x RS422 (RJ45 socket)	Fronius Solar Net, interface protocol	
Power Line Communication (PLC)	Yes – SunSpec Rapid Shutdown communication standard	
Wi-Fi/Ethernet/Serial/ Datalogger and webserver <sup>2</sup>	Wireless standard 802.11 b/g/n / Fronius Solar.web, SunSpec Modbus TCP, JSON / SunSpec Modbus RTU	
6 inputs and 4 digital I/Os <sup>2</sup>	Load management; signaling, multipurpose I/O	

<sup>2</sup> Available with the Fronius Datamanager 2.0 Card (only one card required for up to 100 inverters)


## TECHNICAL DATA FRONIUS SYMO (480 V VERSIONS)

INPUT DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Max. PV generator output (P <sub>dc max</sub> )	22.5 kW <sub>peak</sub>	30 kW <sub>peak</sub>	34 kW <sub>peak</sub>	36 kW <sub>peak</sub>
Max. input current (I <sub>dc max1</sub> / I <sub>dc max2</sub> )	33 A / 25 A			
Max. array short circuit current (MPP1 / MPP2)	49.5 A / 37.5 A			
Nominal input voltage	685 V	710 V	720 V	
DC input voltage range (U <sub>dc min</sub> + U <sub>dc max</sub> )	200 - 1,000 V			
DC startup voltage	200 V			
Usable MPP voltage range (U <sub>mpp min</sub> + U <sub>mpp max</sub> )	350 - 800 V	450 - 800 V	500 - 800 V	
Max. input voltage	1,000 V			
Admissible conductor size DC	AWG 14 - AWG 6 copper direct, AWG 6 aluminum direct, AWG 4 - AWG 2 copper or aluminum with input combiner			
Number of MPP trackers	2			

## FRONIUS SYMO 24.0-3 480 CEC EFFICIENCY CURVE

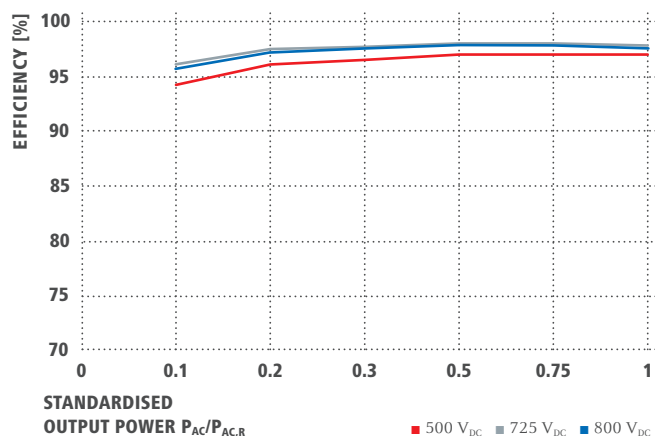

## FRONIUS SYMO 24.0-3 480 TEMPERATURE DERATING CURVE

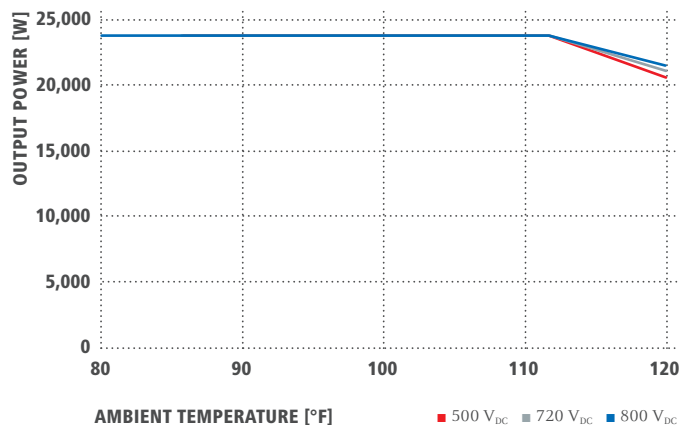

## TECHNICAL DATA FRONIUS SYMO (480 V VERSIONS)

OUTPUT DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
AC nominal Output ( $P_{AC,r}$ )	14,995 W	19,995 W	22,727 W	23,995 W
Max. output power	14,995 VA	19,995 VA	22,727 VA	23,995 VA
Grid connection	480 / 277 V WYE <sup>3</sup>			
Frequency (frequency range $f_{min} - f_{max}$ )	60 Hz (45 - 65 Hz)			
Admissible conductor size (AC)	AWG 14-AWG 6			
Total harmonic distortion	< 1.5 %	< 1 %	< 1.25 %	< 1 %
Power factor ( $C_{OS,ac,r}$ )	0-1 ind. / cap.			
Max. continuous output current	18 A	24 A	27.3 A	28.9 A
OCPD/AC breaker size	25 A	30 A	35 A	40 A

EFFICIENCY	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Max. Efficiency	98 %			
CEC Efficiency	97 %	97.5 %		

GENERAL DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Dimensions (height x width x depth)	510 x 725 x 225 mm (20.1 x 28.5 x 8.9 inches)			
Weight	43.4 kg (95.7 lbs)			
Protection Class	NEMA 4X			
Night time consumption	< 1 W			
Inverter topology	Transformerless			
Cooling	Regulated air cooling			
Installation	Indoor and outdoor installation, tilt from 0 - 90 degree <sup>4</sup>			
DIN rail (length x width x depth)	max. 106 x 90 x 66 mm (max. 4.2 x 3.5 x 2.6 inches)			
Ambient operating temperature range	-40 - +60 °C (-40°F - +140 °F)			
Permitted humidity	0 - 100 % (non-condensing)			
Elevation	2000 m (6562 ft) with a max. input voltage of 1000 V / 3400 m (11155 ft) with a max. input voltage of 850 V			
DC connection technology	6x DC+ and 6x DC- screw terminals for copper (solid / stranded / fine stranded) or aluminum (solid / stranded)			
AC connection technology	Screw terminals 14-6 AWG			
Certificates and compliance with standards	UL 1741-2010 Second Edition (incl. UL1741 Supplement SA 2016-09 for California Rule 21 and Hawaiian Electric Code Rule 14H), UL1998 (for functions: AFCI, RCMU and isolation monitoring), IEEE 1547-2003, IEEE 1547a-2014, IEEE 1547.1-2003, ANSI/IEEE C62.41, FCC Part 15 A & B, NEC 2017 Article 690, C22. 2 No. 107.1-16, UL1699B Issue 2 -2013, CSA TIL M-07 Issue 1 -2013			

<sup>3</sup> +N for sensing purposes - no current carrying conductor

<sup>4</sup> Fronius Shade Cover required for installation angles less than 15 degree

PROTECTIVE DEVICES	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
DC reverse polarity protection	Yes			
Anti islanding	Yes			
Over temperature protection	Output power derating / Active cooling			
AFCI	Yes			
Rapid shutdown compliant	Yes			
Ground Fault Protection with Isolation Monitor Interrupter	Yes			
DC disconnect	Yes			

INTERFACES	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
USB (A socket)	Datalogging and inverter update possible via USB			
2x RS422 (RJ45 socket)	Fronius Solar Net, interface protocol			
Power Line Communication (PLC)	Yes – SunSpec Rapid Shutdown communication standard			
Wi-Fi/Ethernet/Serial/ Datalogger and webserver <sup>2</sup>	Wireless standard 802.11 b/g/n / Fronius Solar.web, SunSpec Modbus TCP, JSON / SunSpec Modbus RTU			
6 inputs and 4 digital I/Os <sup>2</sup>	Load management; signaling, multipurpose I/O			

<sup>2</sup> Available with the Fronius Datamanager 2.0 Card (only one card required for up to 100 inverters)

/ Perfect Welding / Solar Energy / Perfect Charging

### THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 5,660 employees worldwide and 1,321 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)



**Fronius USA LLC**  
 6797 Fronius Drive  
 Portage, IN 46368  
 USA  
[pv-support-usa@fronius.com](mailto:pv-support-usa@fronius.com)  
[www.fronius.us/pv](http://www.fronius.us/pv)

**Fronius International GmbH**  
 Froniusplatz 1  
 4600 Wels  
 Austria  
[pv-sales@fronius.com](mailto:pv-sales@fronius.com)  
[www.fronius.com](http://www.fronius.com)