

# FEED-IN MANAGEMENT FOR COMMERCIAL SOLUTIONS

With Fronius Tauro and Plant Controller meteocontrol / Solar-Log


## THE ADVANTAGES AT A GLANCE:

- / Custom-fit solution for commercial systems
- / Control and monitor your PV system centrally
- / Easy integration through interfaces integrated as standard
- / Plug & play
- / Grid-compliant feed-in management
- / Communication with grid operator
- / Optional safety functions



- 1 Fronius Inverter
- 2 Plant Controller

## CONFIGURATION DIAGRAM:

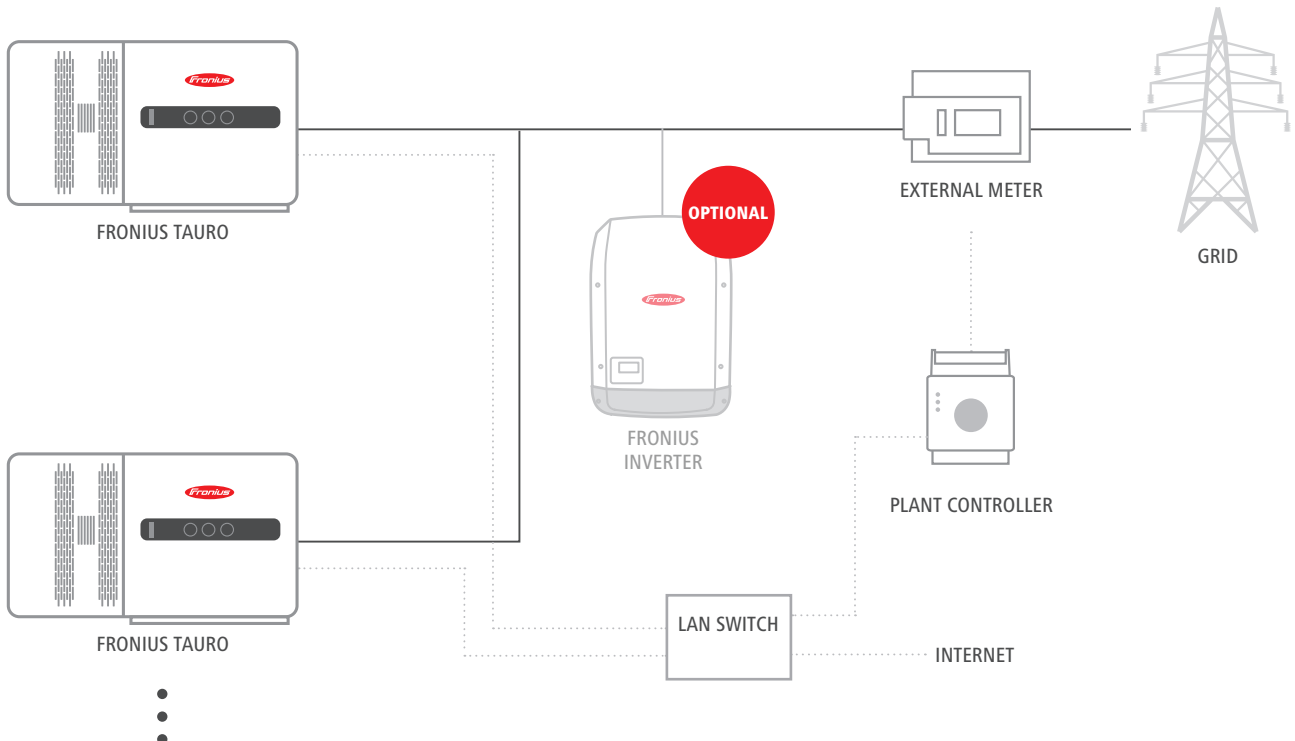

## WHAT IS NEEDED TO IMPLEMENT THE FEED-IN MANAGEMENT SOLUTION?

DEVICE	TYPE	NOTE
INVERTER	Any Fronius inverter	Fronius Tauro (ECO) Fronius GEN24 (Plus) Fronius SnapINverter from Datamanager 2.0
PLANT CONTROLLER SYSTEM	<p><b>Solar-Log</b> Solar-log Base series (15, 100, 2000)</p> <p><b>meteocontrol</b> BlueLog X series</p>	<p>You can find further details on Solar-Log and meteocontrol at <a href="http://www.solar-log.com">www.solar-log.com</a> or <a href="http://www.meteocontrol.com">www.meteocontrol.com</a>*</p> <p>* Compatible with other third-party suppliers that are SunSpec compliant. More information can be obtained directly from the Plan Controller System supplier.</p>
EXTERNAL METER	JANITZA UMG 604 or similar	<p><b>Solar-Log</b> For effective power control: / Solar-Log meter / Various meters from third party suppliers For increased current measurement capability or reactive power control: / Solar-Log Utility Meter More information at <a href="http://www.solar-log.com/">www.solar-log.com/</a></p> <p><b>meteocontrol</b> For direct measurement up to 63 A: / Schneider Electrics IEM 3155 For increased current measurement capability: / Janitza UMG 512 Pro / Janitza UMG 604-E Pro / Janitza UMG 96RM-EL / Schneider Electrics IEM 3255 More information at <a href="http://meteocontrol.com/">meteocontrol.com/</a></p>
LAN SWITCH / DISTRIBUTOR	Dependent on the required connections Important: connection for Plant Controller as well as connection to the Internet.	
POWER SUPPLY	24 V power supply unit	<b>Solar-Log</b> Optional 12 V power supply unit possible.
INVERTER COMMUNICATION	Cable connection (from CAT5) Via Modbus TCP	Fronius inverters (Tauro ECO or GEN24 Plus) are connected to the Plant Controller via Modbus TCP. Each individual inverter must be connected to the LAN switch.
COMMUNICATION CONNECTION TO METER	Cable connection (from CAT5) via Modbus TCP or Cable connection (from CAT5) via Modbus RTU (RS 485)	The type of Modbus connection depends on the meter used.

DEVICE	TYPE	NOTE
SNAPINVERTER INTEGRATION <div data-bbox="268 272 360 370" style="color: red; font-weight: bold; border-radius: 50%; width: 40px; height: 40px; display: inline-block; text-align: center; vertical-align: middle; margin-left: 10px;">OPTIONAL</div>	Cable connection (from CAT5) via Modbus TCP	<p>When integrating Fronius SnapINverters, for <b>Solar-Log</b> each inverter must be connected to Datamanager 2.0 via Modbus TCP.</p> <p>For <b>meteocontrol</b>, at least one of the SnapINverters must have a Datamanager 2.0. Additional SnapINverters can be connected in the system via a Fronius Solar Net ring (max. 6 SnapINverters per ring).</p>
MONITORING	Fronius Solar.web	In the case of these system solutions with Plant Controllers, the consumption and feed-in data on the low voltage side can be visualised in Fronius Solar.web with the help of a Fronius Smart Meter.

Take a look at our reference to see a great example of our feed-in management solutions in practice:



AUSTRIA  
REFERENCE:





## APPROVED



### COST-EFFECTIVE AND ECOLOGICALLY SUSTAINABLE:

The Fronius Tauro is an important step closer to our vision of 24 hours of sun.

Sustainability is a top priority throughout the entire product life cycle of the Tauro.

The following facts speak for themselves:

- / Replacing the power stage set avoids the need to replace the device
- / Smart hardware design reduces the number of essential, additional components
- / Longer service life thanks to the active double-walled cooling technology

/ Perfect Welding / Solar Energy / Perfect Charging

### THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 5,660 employees worldwide and 1,321 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)

**Fronius India Private Limited**  
 Plot no BG-71/2/B,  
 Pimpri Industrial Area,  
 MIDC- Bhosari,  
 Pune- 411026, India  
[pv-sales-india@fronius.com](mailto:pv-sales-india@fronius.com)  
[www.fronius.in](http://www.fronius.in)

**Fronius Australia Pty Ltd.**  
 90-92 Lambeck Drive  
 Tullamarine VIC 3043  
 Australia  
[pv-sales-australia@fronius.com](mailto:pv-sales-australia@fronius.com)  
[www.fronius.com.au](http://www.fronius.com.au)

**Fronius UK Limited**  
 Maidstone Road, Kingston  
 Milton Keynes, MK10 0BD  
 United Kingdom  
[pv-sales-uk@fronius.com](mailto:pv-sales-uk@fronius.com)  
[www.fronius.co.uk](http://www.fronius.co.uk)

**Fronius International GmbH**  
 Froniusplatz 1  
 4600 Wels  
 Austria  
[pv-sales@fronius.com](mailto:pv-sales@fronius.com)  
[www.fronius.com](http://www.fronius.com)